# CYLINDER ACCESSORIES

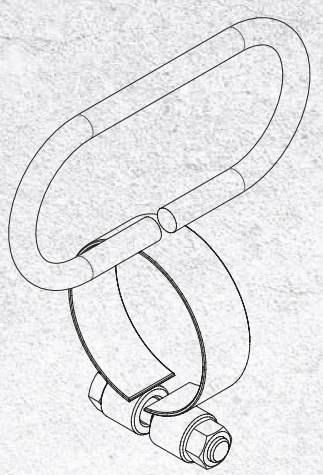

## CYLINDER LIFTING HANDLES

- Designed for ease of carrying
- Provides better control for positioning cylinder

| Model Number | For Cylinders |
|---|---|
| LH25T34 | H2504 through H2514 |
| LH30T40 | H3008, HD3008, HD3014, HC2002T, HC2006T |
| LH30T45 | HC3002T, HC3006T, HD3007, HDC3010 |
| LH55T49 | HLN5504 through HLN5512 |

## CLEVIS AND TANGS

CEP Series







Rod

CEB Series







Base

CED Series



CP10




| Application | For use with Cylinder Capacity (tons) | Model Number | Dimensions (in) | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | | A | B | C | D | E | F | G |
| Rod | 5 | CEP05 | ¾″-16UNF | 1.13 | 2.25 | 0.63 | 0.62 | 0.56 | - |
| | 10 | CEP10 | 1″-8UNC | 1.69 | 3.31 | 0.88 | 0.75 | 1.00 | - |
| | 15 | CEP15 | 1″-8UNC | 1.69 | 3.31 | 0.88 | 0.75 | 1.00 | |
| | 25 | CEP25 | 1½″-16 | 2.25 | 3.81 | 1.25 | 0.87 | 1.50 | - |
| Base | 5 | CEB05 | 1.52 | 1.75 | 2.13 | 0.63 | 0.26 | 1.13 | - |
| | 10 | CEB10 | 2.28 | 2.50 | 2.87 | 0.88 | 1.69 | 0.32 | - |
| | 15 | CEB15 | 2.77 | 3.00 | 2.87 | 0.88 | 1.69 | 0.38 | - |
| | 25 | CEB25 | 3.40 | 3.75 | 3.37 | 1.25 | 2.25 | 0.56 | - |
| Rod & Base | 9 | CED09 | 1 | 1 | 1-11/16″-18 | 0.75 | 1.31 | 0.94 | ¾″- 16 |
| | 16 | CED16 | 1.25 | 1 | 2-3/16″-16 | 1 | 1.88 | 1.19 | 1⅛″ 12 |
| | HP1006 only | CP10* | M30x2 | 2.95 | 6.30 | 1.18 | 3.74 | 1.38 | 2.56 |

* 2-pc set with an adapter

# BASES

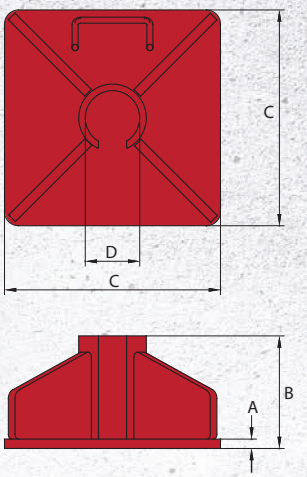

| For use with Cylinder Capacity (tons) | Model Number | Dimensions (in) | | | |
|---|---|---|---|---|---|
| | | A | B | C | D |
| 5 | CB05 | 0.32 | 4.65 | 7.87 | 1.54 |
| 10 | CB10 | 0.39 | 4.72 | 9.06 | 2.28 |
| 15 | CB15 | 0.47 | 4.80 | 10.00 | 2.76 |
| 25 | CB25 | 0.63 | 4.96 | 11.02 | 3.41 |

# SADDLES

SD SERIES

SDT10

HTD10




FIGURE #1




FIGURE #2




FIGURE #3




FIGURE #4

| Saddle Type | Model Number | Capacity (ton) | For Cylinder(s) | Dimensions (in) | | | | Figure Number |
|---|---|---|---|---|---|---|---|---|
| | | | | A | B | C | D | |
| Tilt | SDT05 | 5 | H05 | 0.98 | 1.22 | - | 0.63 | 2 |
| | SDT10 | 10 | H10 | 1.38 | 1.50 | - | 0.74 | 2 |
| | SDT15 | 15 | H15 | 1.50 | 1.57 | - | 0.73 | 2 |
| | SDT25 | 25 | H25 | 1.97 | 1.6 | - | 1.29 | 2 |
| | SDT55 | 55-100 | H55, HD55, H75, HD75, H100, HLN55 and HLN100 | 2.80 | 1.29 | 0.67 | 0.51 | 2 |
| | SDTG100 | 100 | HG100/HDG100 | 2.95 | 2.64 | 1.71 | 0.79 | 4 |
| | SDTG150 | 150 | HG150/HDG150 | 3.70 | 2.71 | 1.77 | 0.77 | 4 |
| | SDTG200 | 200 | HG200/HDG200 | 4.45 | 3.25 | 1.95 | 1.10 | 4 |
| | SDT200 | 200 | HLN 150/HLN200 | 5.12 | 1.77 | 1.02 | 0.53 | 4 |
| Grooved | SD05 | 5 | H05 | 0.98 | 0.81 | - | 0.24 | 1 |
| | SD10 | 10 | H10 | 1.38 | 1.06 | - | 0.24 | 1 |
| | SD15 | 15 | H15 | 1.50 | 1.18 | - | 0.28 | 1 |
| | SD25 | 25 | H25 | 1.97 | 1.14 | - | 0.28 | 1 |
| Threaded | HTD10 | 10 | HT1006 & HT1010 | 1 ¼"-11.5NPTF | 0.95 | 1"-8UNC | 1.77 | 3 |